



## Mini Electropneumatic Positioner

### HC4 Diaphragm Valves

HC4/131/01/06.04

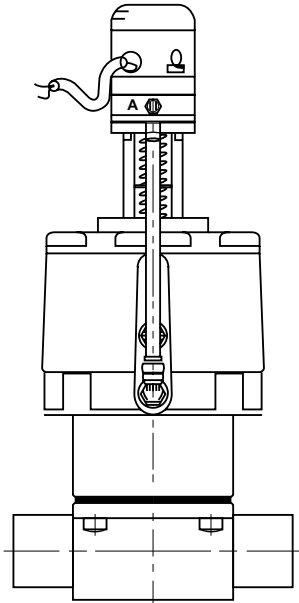

Mini electropneumatic positioner mounted on an EC actuator

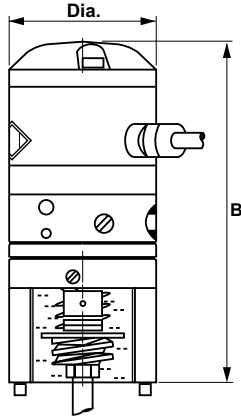

Mini electropneumatic positioner with feedback spring and position indicator

	Diameter in (mm)	B in (mm)
0.25"-1.00"(DN8-25)	2.36 (60)	6.10 (155)
1.50"-2.00"(DN40-50)	3.15 (80)	6.89 (175)

Technical Specification			
Suitable for	EC spring close actuators standard and light spring	Hysteresis	1.5%
Size Range	Type A & HC4: 0.25"-2.00"(DN8-DN50 )	Sensitivity of response	0.15%
Type	Electropneumatic	Air Consumption	400-600 l/hr depending on supply pressure
Control Signal	4-20 mA 0-20 mA	IP rating	IP54
Air Connections	1/8" BSP 1/8" NPT	Temperature Range	-14°F to 140°F (-10°C to +60°C)
Conduit Entry	PG 7 gland	Material of Construction	Chrome plated brass IP converter. Anodised aluminium/POM
Supply Pressure	43.5-87 psi (3-6 bar)	Weight	2.8lb. (1.3kg)
Add-ons	Inductive proximity sensors	Options	Intrinsically safe EEx ib IIC T6

Crane Process Flow Technologies  
 Saunders HC4 Products  
 9860 Johnson Road  
 Montgomery, Texas 77316  
 www.cranesaunders.com  
 PH 936-588-4447  
 Fax 936-588-8302

